

User Manual
HDMI 2.0 LCD Test Pattern Monitor

Model PT-TOOL-500

Designed in Germany

© 2016 PureLink GmbH All rights reserved.

Table of Contents

1. Safety and Notice	2
2. Introduction	3
3. Features	3
4. Package Contents	3
5. Specification	4
6. Connection Diagram	5
7. Panel Description	6
8. Menu Operation	7
9. Generator	8
10. Receiver	9
11. HDCP Test	10
12. EDID Analysis	11
13. LOOP Test	12
14. Ethernet Control (Tcp/Ip)	13
15. Upgrade PT-TOOL-500	17
16. EYE Pattern	20
17. Warranty	22

The PT-TOOL-500 HDMI 2.0 LCD Test Pattern Monitor has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipments, the PT-TOOL-500 should be used with care. Please read and follow the safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Follow all instructions and warnings marked on this unit.
- Do not attempt to service this unit yourself, except where explained in this manual.
- Provide proper ventilation and air circulation and do not use near water.
- Keep objects that might damage the device and assure that the placement of this unit is on a stable surface.
- Use only the power adapter and power cords and connection cables designed for this unit.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.



2. Introduction

The PT-TOOL-500 HDMI 2.0 LCD Test Pattern Monitor is a versatile HDMI 2.0 toolbox with full bandwidth and HDCP 2.2 support. For ease of HDMI 2.0 installations, PT-TOOL-500 is equipped with both HDMI 2.0 pattern generator and analyzer. With this handy and portable gadget, users will appreciate at the built-in long hour operation chargeable battery, video patterns, touch panel control, cloud based firmware upgrade access and many other features such as HDCP analyzer or loop test in single piece of device. In the meantime, PT-TOOL-500 can support 8 channel LPCM audio with selectable sample rate. One more attractive feature of PT-TOOL-500 comes from bypassing HDMI input to the connected display or built-in 4.3" touch panel to allow users to verify HDMI sources instantly.

PT-TOOL-500 is the most cost effective HDMI 2.0 tool in the market to make HDMI installation much easier than ever.

3. Features

- 4K2K60 4:4:4 8bit, 4K2K60 4:2:0 16bit HDR pattern generator
- 4.3" touch panel
- Supports mouse control
- Supports user control device through Ethernet
- Firmware update through USB Flash Drive
- Supports user defined pattern up to 2GB
- Embedded LINUX KERNAL system with limitless extension
- Scrambler supported for videos over 340MHz output wise
- Loop test capability to provide statistics analysis for connection stability
- Supports HDMI loop through function
- HDCP test allow verify HDCP of HDMI source and transmit HDCP encrypted video
- Qualified physical layer performance to ensure the best compatibility
- Battery powered for portability, it can extend operation time with full load up to 4 hours
- Rechargeable battery design with short charging time about 2 hours.



1. Before using the PT-TOOL-500, please plugging the power adapter to switch off the shipping mode.

4. Package Contents

- 1x PT-TOOL-500
- 1x IR blaster 1x IR receiver
- 2x DC 24V
- 1x User Manual


5. Specifications

Technical		
Role of usage	Generator / Analyzer	
Video bandwidth	Single link 600MHz [18Gbps]	
HDMI compliance	HDMI 2.0 and below	
HDCP compliance	HDCP 2.2 and below	
Video Support	Up to 4K2K60 4:4:4 8bit, 4K2K60 4:2:0 16bit (HDR)	
Video Format Support	HDMI	
Audio support	8ch LPCM up to 192K	
Control	USB mouse / touch panel / Ethernet	
ESD protection	Human body model — ±15kV [air-gap discharge] & ±8kV [contact discharge]	
Input	1x HDMI + 1xUSB + 1x RJ-45(Ethernet)	
Output	1x HDMI + 1x 3.5mm(Stereo)	
USB Support	USB 2.0	
HDMI connector	Type A [19-pin female]	
USB Connector	Type A	
RJ-45 connector	WE/SS 8P8C with 2 LED indicators	
Mechanical		
Housing	Metal enclosure	
Dimensions [L x D x H]	Model	105 x 166 x 42mm[4.1" x 6.6" x 1.7"]
	Package	371 x 170 x 77mm[1'5" x 6.7" x 3"]
	Carton	410 x 368 x 393mm[1'3" x 1'4" x 1'5"]
Weight	Model	765g [27oz]
	Package	1294g [2.8 lbs]
Power supply	12V 5A DC / Battrery	
Power consumption	15 Watts	
Operation temperature	0~40°C [32~104°F]	
Storage temperature	-20~60°C [-4~140°F]	
Relative humidity	20~90% RH [no condensation]	

6. Connection Diagram


- HDMI
- USB
- CAT5/5e/6
- AUDIO

PT-TOOL-500

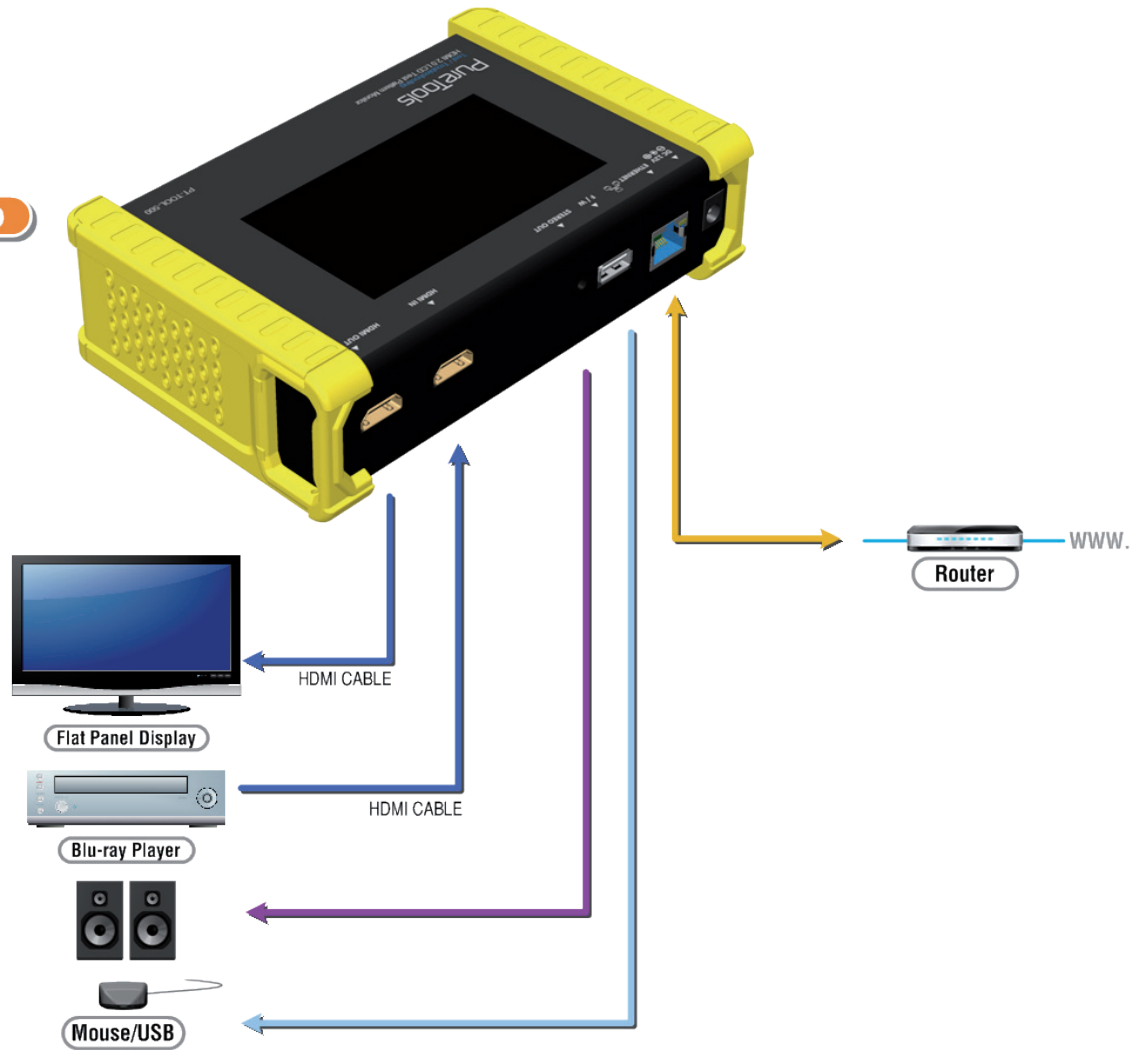

7. Panel Description

Front Panel

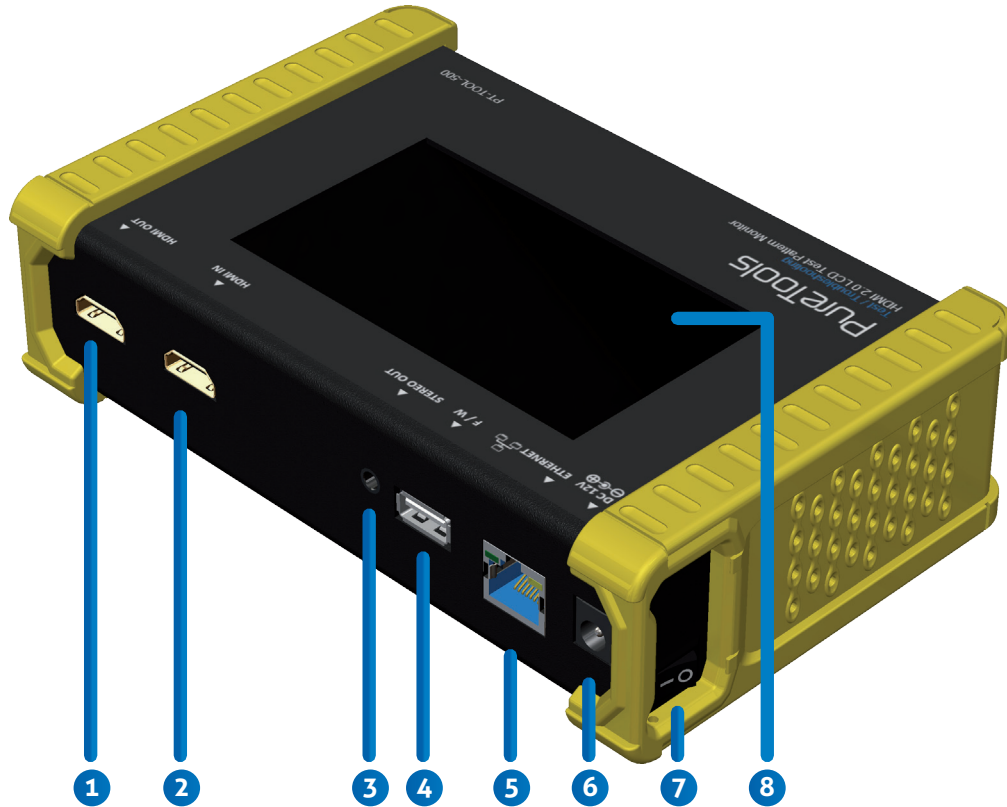

1. **OUTPUT:** HDMI output
2. **INPUT:** HDMI input
3. **Stereo Out:** Analog audio output
4. **USB:** Connect to USB device for control or firmware update
5. **Ethernet:** Ethernet control
6. **+12V DC:** 12V 5A DC power jack
7. **Power Switch:** Power ON/OFF switch
8. **Touch Panel:** Touch screen for control

8. Menu Operation

The major functions of the device are listed below

- ▶ HDMI Generator
- ▶ HDMI Receiver
- ▶ HDCP Test
- ▶ EDID Test
- ▶ Loop Test

Please refer the table below and the following section to know how to operate these functions.

OUTPUT SETTING

Menu	Items	Remark
Signal Format	TYPE	select the HDMI/DVI signal type information (color space and color depth)
	RESOLUTION	setting the TV/PC resolution and frequency
VIDEO Pattern	DEFAULT	multiple patterns to test HDMI device, it also provides user to set the timer and moving squares
	ALBUM	
PCM Audio Tone	MUTE	mute / unmute the PCM audio
	TONE	for user setting the audio information to test audio on HDTV or other A/V receivers
Setting	SCRAMBLER	for user to understand the signal encode a message situation

TEST SETTING

Menu	Items	Remark
Source	Format	read format information from source
	Video	provide small screen for user to check the video information and also provide video pass through to the display
	Audio	read audio information
	Packet	read packet
	HDCP	enable HDCP function (1.4/2.0)
Sink	EDID	EDID analyzer or learn EDID from RX
	HDCP	HDCP test
Loop		evaluate the quality of cables or EUT


SYSTEM SETTING

***MEMU ITEMS SUBJECT TO CHANGE WITHOUT NOTIFICATION.**

Menu	Items	Remark
Preference	Screen Brightness	adjust the screen brightness
	BEEP	ON/OFF system sound
Ethernet	DHCP	
	Static IP	
Firmware		upgrade the firmware
Battery		battery status

9. Generator

PT-TOOL-500 as HDMI Generator

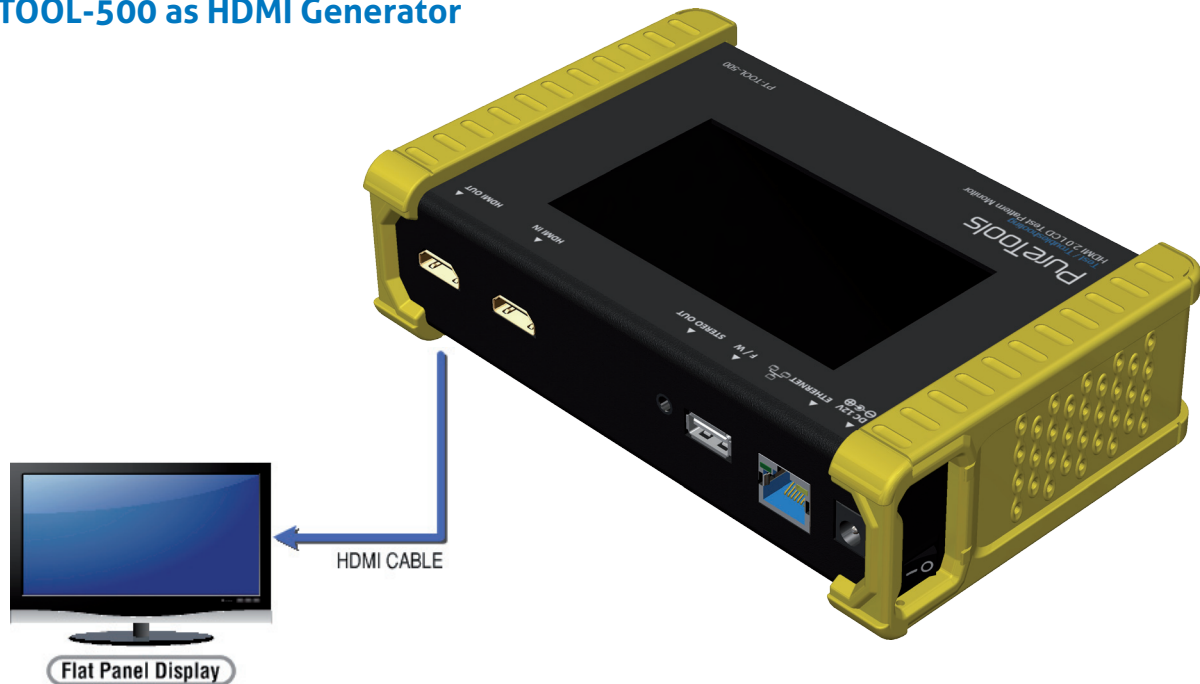

After making the physical connections between PT-TOOL-500 and the display device. User can select different generator function to display on the sink device under test.

1. Selecting the Signal Format

PT-TOOL-500 provides different signal resolution and signal types for user to select. User can touch the Signal Format Tab to select the signal type (HDMI / DVI) and signal resolution (HDTV / PC). The HDTV resolution is up to 4K2K 60Hz and PC resolution is up to 1920x1200 60Hz.

2. Rendering Test Patterns on an HDTV

PT-TOOL-500 provides multiple test patterns for user select to test HDTV. User can select the desired test pattern from the video pattern menu.

3. User Defined Pattern

Besides the embedded test patterns, PT-TOOL-500 also provides user defined patterns function for user to use custom test image. More details please see the Upgrade PT-TOOL-500 section.

4. Testing Digital Audio on an HDTV or A/V Receiver


The PCM Audio Tone menu provides user for test audio on HDTV or other A/V receivers. In the PCM SINE WAVE menu, user can set up the bits per sample, sample rate, level and audio channel.

5. Testing HDCP on an HDMI TV or HDMI device

PT-TOOL-500 provides user to test HDCP on an HDMI equipped HDTV. For more details please see the HDCP test section.

10. Receiver

PT-TOOL-500 as HDMI Analyzer

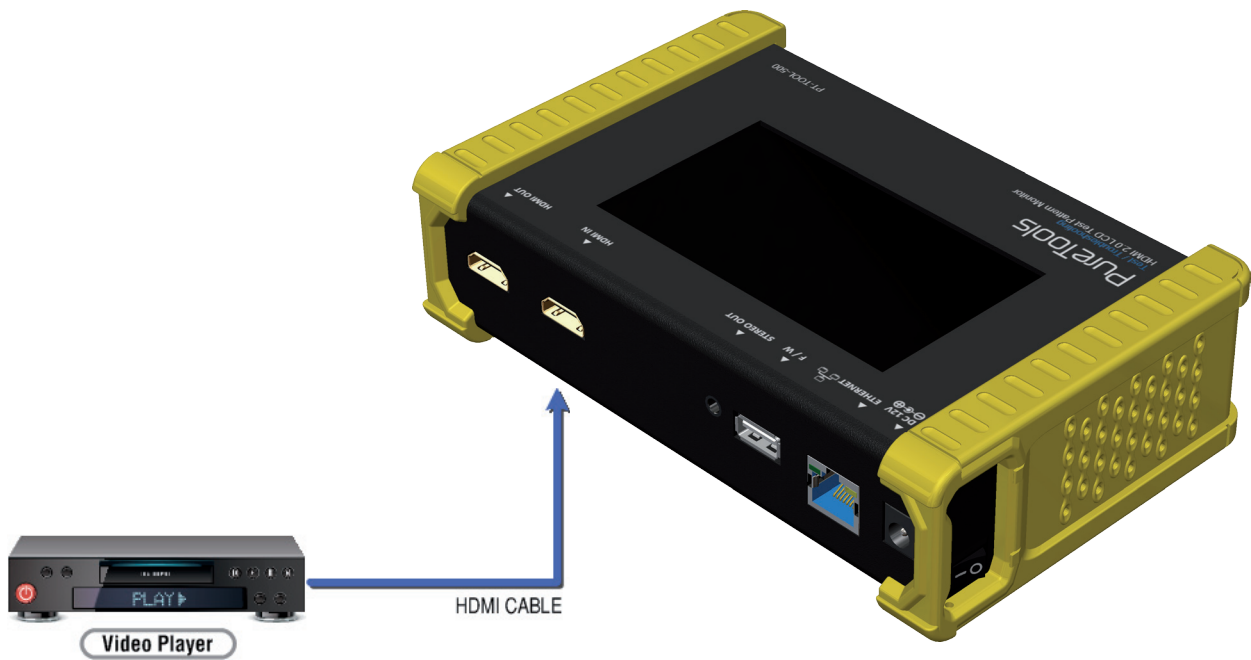

1. Source Information from the HDMI source


In the Test/Source menu, user can touch the read/refresh button to get the video format, source audio and packet information from the HDMI source device.

2. Testing the Video from the HDMI source

PT-TOOL-500 supports the incoming video from HDMI source/device to ensure user is receiving a valid video signal by displaying the information of incoming signal. The video information also will inform user whether the HDCP is encrypted or not. Return to Video menu by touching the touch panel (please stay at least 5 seconds).


11. HDCP Test

PT-TOOL-500 as HDCP Receiver

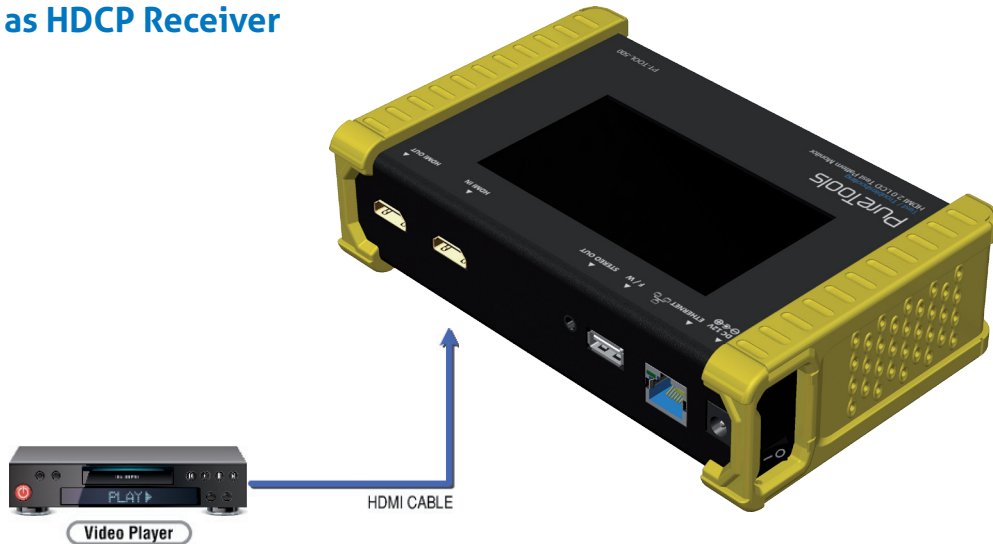

When PT-TOOL-500 set as receiver, it can verify HDCP of video player or other DUT (Device Under Test). PT-TOOL-500 provides three options (HDCP 1.4 / HDCP 2.2 / no HDCP) for users to select and confirm the HDCP authentication of DUT.

PT-TOOL-500 as HDCP Transmitter

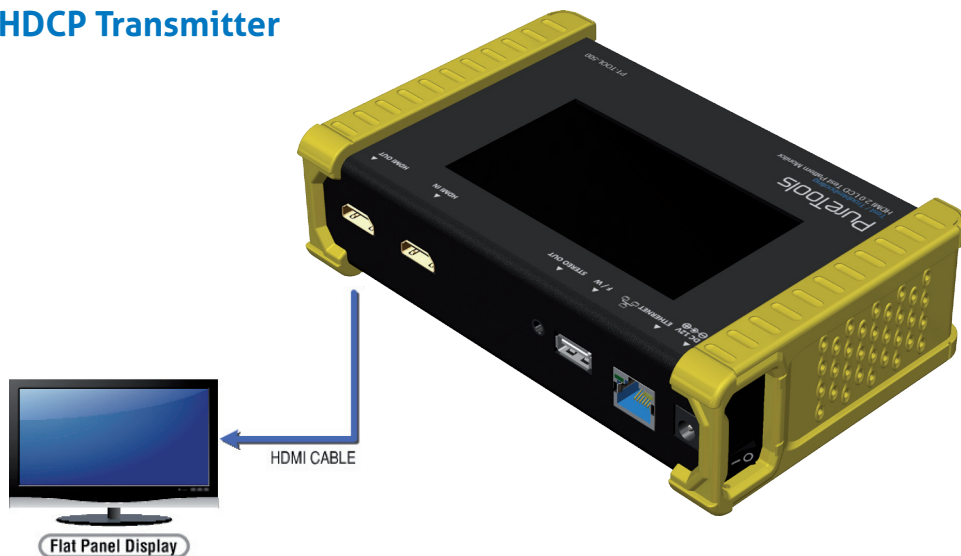

When PT-TOOL-500 set as transmitter, it can transmit HDCP encrypted video. PT-TOOL-500 also provides three modes (HDCP 1.4 / HDCP 2.2 / no HDCP) for you to select. If user wants to transmit HDCP encrypted video again, please select the Auto-Restart button.

Procedure for Testing HDCP:

- ▶ Make the connection between the PT-TOOL-500 HDMI output port and the display.
- ▶ Select **HDCP Test** from the Sink Test Menu.
- ▶ Touch **Enable HDCP 1.4** or **Enable HDCP 2.2** button.

12. EDID Analysis

PT-TOOL-500 offers the most convenient way for user to analyze the EDID. You can verify, view and learn the EDID of an HDMI HDTV or other devices.



Procedure of EDID Analyze:


- ▶ Make sure the connections between the PT-TOOL-500 HDMI output port and the device.
- ▶ Select **EDID Analyze** from the Sink Test Menu.
- ▶ Touch the **Read** button to get the EDID information of DUT.

Procedure of learning EDID from RX:

- ▶ Make sure the connections between the PT-TOOL-500 HDMI output port and the device.
- ▶ Select **EDID Analyze** from the Sink Test Menu.

13. LOOP Test

PT-TOOL-500 offers the unique estimator for evaluating the quality of cables or DUT. Users can simply connect the cable or DUT to PT-TOOL-500 to form a loop, the monitor will examine the HDMI bitstream pixel by pixel. The measurement statistics will be displayed on screen and offer useful information for building up robust A/V system.

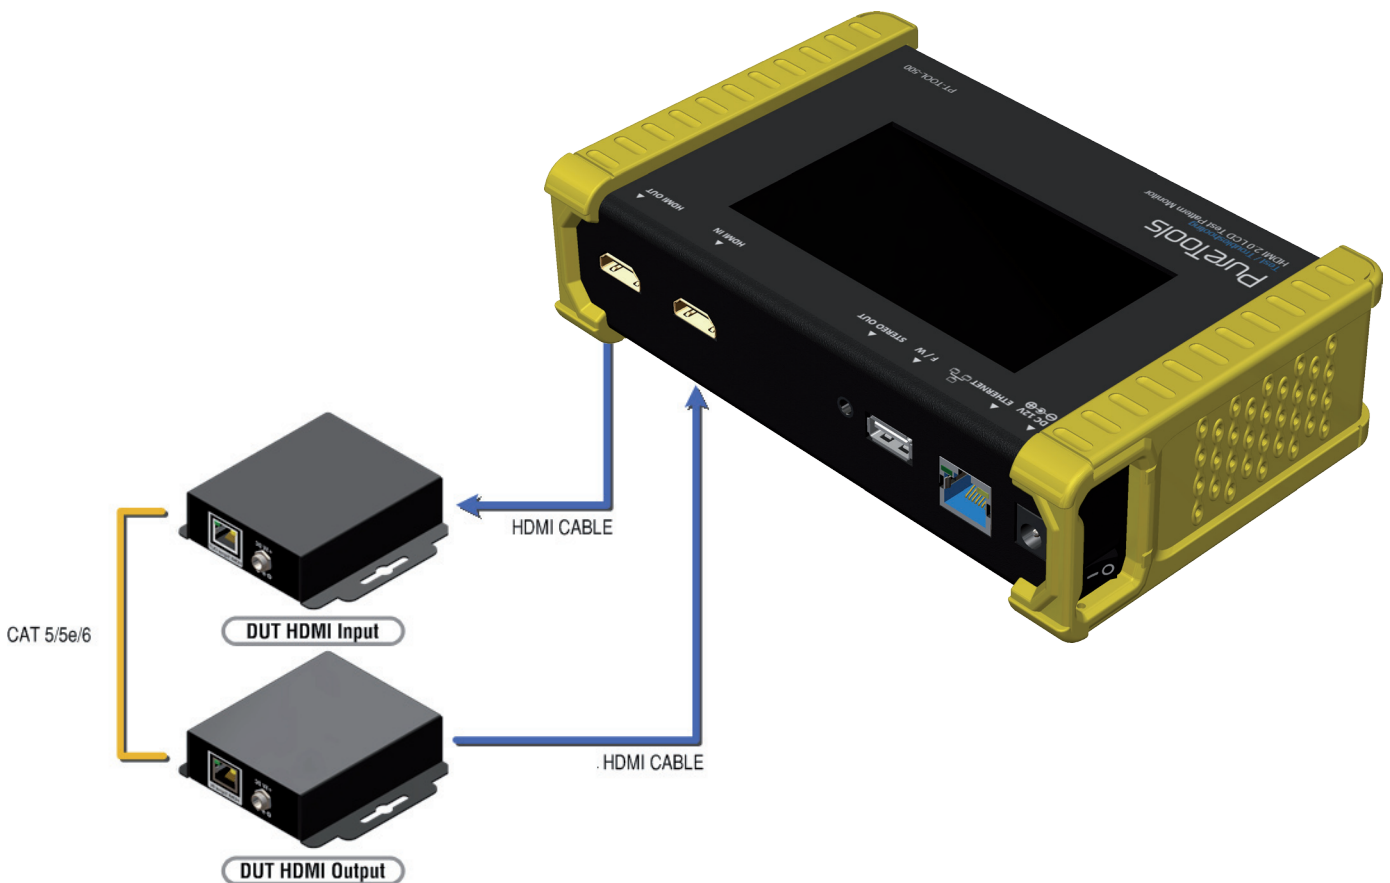

Procedure of Loop Test: *only support 1080p@60, 4K2K 30Hz and 4K2K 60Hz resolution

- ▶ Make sure the connection between the PT-TOOL-500 and the DUT or cables.
- ▶ Select Loop Test from the Loop Test Menu.
- ▶ Set the test time and touch the START button. The PT-TOOL-500 will capture the signal from its transmitter through the loop and evaluate the transmission quality.
- ▶ The user interface of PT-TOOL-500 will be locked until testing terminated. Unless user wants to break off the test.

Test Result	Definition
Pass	The value of Bit Error Rate is less than 1
Fail	The Bit Error Rate is more than 1

*** Plugging HdmI Cable Will Influnce The Testing Result, So Please Settle Down The Connection Before Starting Running Test.**

14. Ethernet Control (Tcp/Ip)

PT-TOOL-500 also provides user control through Ethernet. The Ethernet control includes many major functions, it can offer user develop software to do advance setting. (TCP Port: 6133)

Reply Format:

Received = ACK + Feedback Date

ACK: 0xaa 0xbb 0xcc

Feedback Date: Data0 Data1 Data2....

Command Set:

* **Bold word part please refer to corresponding table**

COMMAND	ACTION	RAMARK
0x4d 0x53 0x5 0x0 0x0 0x5 0x1 Res	Set output resolution	Hexadecimal
0x4d 0x53 0x5 0x0 0x0 0x5 0x2	Get output resolution	
0x4d 0x53 0x5 0x0 0x0 0x5 0x3 Mode	Set output mode	
0x4d 0x53 0x5 0x0 0x0 0x5 0x4	Get output mode	
0x4d 0x53 0x5 0x0 0x0 0x5 0x5 Depth	Set output color depth	
0x4d 0x53 0x5 0x0 0x0 0x5 0x6	Get output color depth	
0x4d 0x53 0x5 0x0 0x0 0x5 0x7 Pattern	Set default pattern	Hexadecimal
0x4d 0x53 0x5 0x0 0x0 0x5 0x8 Pattern	Set user pattern	Hexadecimal
0x4d 0x53 0x5 0x0 0x0 0x5 0x9 Mute	Set audio mute	
0x4d 0x53 0x5 0x0 0x0 0x5 0xa	Get audio mute status	
0x4d 0x53 0x5 0x0 0x0 0x5 0xb Length	Set audio length	
0x4d 0x53 0x5 0x0 0x0 0x5 0xc	Get audio length	
0x4d 0x53 0x5 0x0 0x0 0x5 0xd Level	Set audio level	
0x4d 0x53 0x5 0x0 0x0 0x5 0xe	Get audio level	
0x4d 0x53 0x5 0x0 0x0 0x5 0xf Rate	Set audio sample rate	
0x4d 0x53 0x5 0x0 0x0 0x5 0x10	Get audio sample rate	
0x4d 0x53 0x5 0x0 0x0 0x5 0x11 Number	Set audio channel number	
0x4d 0x53 0x5 0x0 0x0 0x5 0x12	Get audio channel number	
0x4d 0x53 0x5 0x0 0x0 0x5 0x13 HDCP	Set TX HDCP on/off	
0x4d 0x53 0x5 0x0 0x0 0x5 0x14	Get TX HDCP on/off	
0x4d 0x53 0x5 0x0 0x0 0x5 0x15 HDCP	Set RX HDCP on/off	
0x4d 0x53 0x5 0x0 0x0 0x5 0x16	Get RX HDCP on/off	

Command Set:

Index	Resolution	Index	Resolution	Index	Resolution
0x0	720x480i@60	0x13	1920x1080p@24	0x26	1920x1200pRB
0x1	720x576i@50	0x14	1920x1080p@23.976	0x27	3840x2160p@60
0x2	720x480p@60	0x15	640x480p@60	0x28	3840x2160p@59.94
0x3	720x576p@50	0x16	640x480p@75	0x29	3840x2160p@50
0x4	1280x720p@60	0x17	800x600p@60	0x2a	3840x2160p@30
0x5	1280x720p@59.94	0x18	800x600p@75	0x2b	3840x2160p@29.97
0x6	1280x720p@50	0x19	1024x768p@60	0x2c	3840x2160p@25
0x7	1280x720p@30	0x1a	1024x768p@75	0x2d	3840x2160p@24
0x8	1280x720p@29.97	0x1b	1280x1024p@60	0x2e	3840x2160p@23.976
0x9	1280x720p@25	0x1c	1280x1024p@75	0x2f	1920x1080p@60
0xa	1920x1080i@60	0x1d	1360x768p@60	0x30	4096x2160p@60
0xb	1920x1080i@59.94	0x1e	1366x768p@60	0x31	4096x2160p@59.94
0xc	1920x1080i@50	0x1f	1400x1050p@60	0x32	4096x2160p@50
0xd	N/a	0x20	1600x1200p@60	0x33	4096x2160p@30
0xe	1920x1080p@59.94	0x21	1440x900p@60	0x34	4096x2160p@29.97
0xf	1920x1080p@50	0x22	1440x900p@75	0x35	4096x2160p@25
0x10	1920x1080p@30	0x23	1680x1050p@60	0x36	4096x2160p@24
0x11	1920x1080p@29.97	0x24	1680x1050pRB	0x37	4096x2160p@23.976
0x12	1920x1080p@25	0x25	1920x1080pRB		

Mode

Index	0x0	0x1	0x2	0x3	0x4
Mode	DVI	RGB	YCbCr444	YCbCr422	YCbCr420

Depth

Index	0x0	0x1	0x2	0x3
Depth	8 Bit	10 Bit	12 Bit	16 Bit

Index	Default Pattern	Index	Default Pattern	Index	Default Pattern
0x0	SMPTE BAR	0x10	Ramp Green V 2	0x20	Black
0x1	TV Bar 100%	0x11	Ramp Blue V 2	0x21	Noise
0x2	TV Bar 75%	0x12	Stair Red 1	0x22	Circle 1
0x3	Checkfield	0x13	Stair Red 2	0x23	Circle 2
0x4	EQ	0x14	Stair Green 1	0x24	Moire
0x5	PLL	0x15	Stair Green 2	0x25	V Stripe Red
0x6	Ramp Red H 1	0x16	Stair Blue 1	0x26	V Stripe Green

Index	Default Pattern	Index	Default Pattern	Index	Default Pattern
0x7	Ramp Green H 1	0x17	Stair Blue 2	0x27	V Stripe Blue
0x8	Ramp Blue H 1	0x18	Stair White 1	0x28	H Stripe Red
0x9	Ramp Red H 2	0x19	Stair White 2	0x29	H Stripe Green
0xa	Ramp Green H 2	0x1a	Red 100	0x2a	H Stripe Blue
0xb	Ramp Blue H 2	0x1b	Green 100	0x2b	Chess 1
0xc	Ramp Black to Red V	0x1c	Blue 100	0x2c	Chess 2
0xd	Ramp Green V 1	0x1d	White 100	0x2d	Multi Burst
0xe	Ramp Blue V 1	0x1e	Gray 70	0x2e	CZP
0xf	Ramp Red V 2	0x1f	Gray 40	0x2f	Overscan

User Pattern:

Index	Default Pattern	Index	Default Pattern	Index	Default Pattern
0x0	Philips	0xa	Ramp W-4	0x14	Graybar64 G-1
0x1	Checker 3x3	0xb	Graybar32 R-1	0x15	Graybar64 B-1
0x2	Checker 6x6-1	0xc	Graybar32 G-1	0x16	Graybar64 W-1
0x3	Checker 6x6-2	0xd	Graybar32 B-1	0x17	Graybar64 R-2
0x4	White 75	0xe	Graybar32 W-1	0x18	Graybar64 G-2
0x5	White 50	0xf	Graybar32 R-2	0x19	Graybar64 B-2
0x6	White 25	0x10	Graybar32 G-2	0x1a	Graybar64 W-2
0x7	Ramp W-1	0x11	Graybar32 B-2	0x1b	User Add..
0x8	Ramp W-2	0x12	Graybar32 W-2	0x1c	User Add..
0x9	Ramp W-3	0x13	Graybar64 R-1	0x1d

Mute

Index	0x0	0x1
Mute	OFF	ON

Length

Index	0x0	0x1	0x2
Length	24 bits	20 bits	16 bits

Level

Index	0x0	0x1	0x2	0x3	0x4	0x5	0x6	0x7
Level	Level 0	Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7

Rate

Index	0x0	0x1	0x2	0x3	0x4
Rate	48 KHz	96 KHz	192 KHz	32 KHz	44.1 KHz

Number

Index	0x0	0x1	0x2	0x3	0x4
Number	2 Ch	2.1 Ch	5.1 Ch	6.1 Ch	7.1 Ch

TX HDCP

Index	0x0	0x1	0x2	0x3
TX HDCP	off	HDCP 1.4	HDCP 2.2 Type0	HDCP 2.2 Type 1

RX HDCP

Index	0x0	0x1	0x2	0x3
RX HDCP	off	HDCP 1.4	HDCP 2.2	HDCP 1.4 & HDCP 2.2


15. Upgrade PT-TOOL-500

User can upgrade the firmware and pattern on the PT-TOOL-500 through the USB interface. If user encounters a problem with the upgrade, please contact the supplier of PT-TOOL-500.


Procedure of Firmware Upgrade:

*Before updating the firmware of PT-TOOL-500, please ensure the file of new firmware files are in the root directory of USB Flash Drive. The file suffix is .dat.

► System

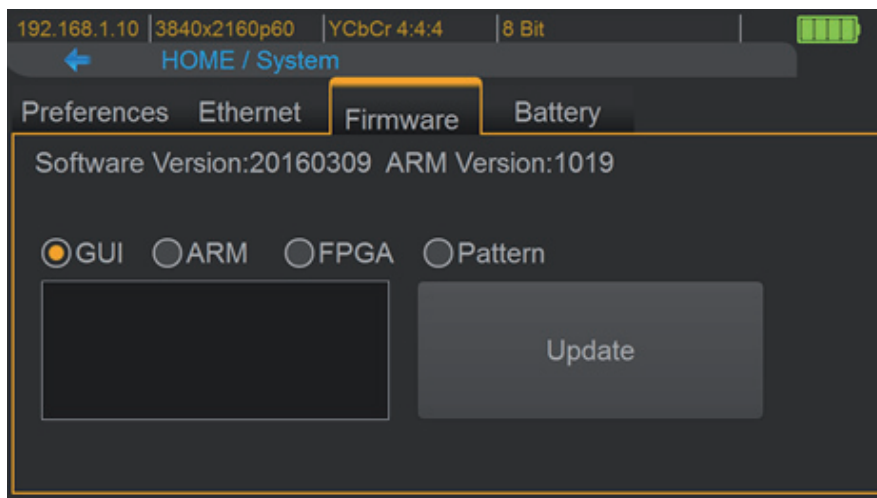


- Make sure the gui.dat and ssysm.dat files are in the root directory of USB.
- Connect the USB Flash Drive on PT-TOOL-500 USB interface.
- Select Firmware button from the System Menu and choose the GUI button.
- Touch the Update button to do firmware update. The process of firmware update will take about 3~5 seconds. While updating, please do not remove the USB Flash Drive.
- After completing the firmware update, please reboot the PT-TOOL-500.
- Select Firmware from the system Menu and choose the System button.

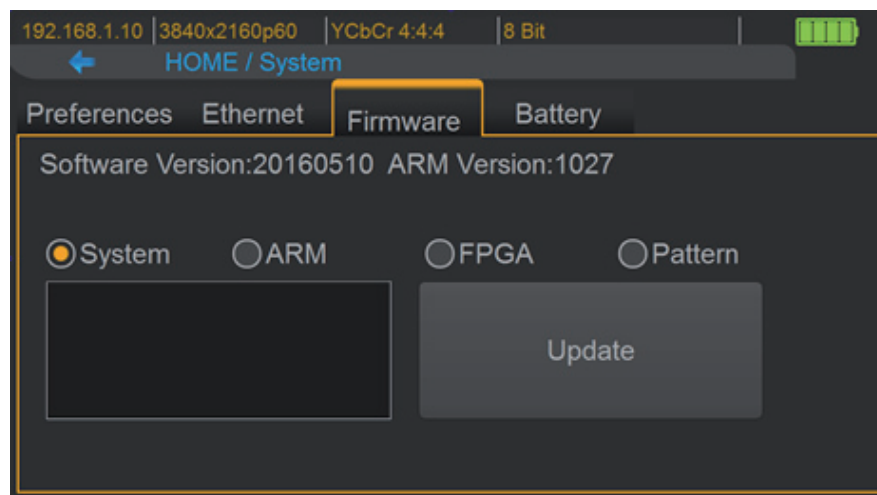


- Touch the Update button to do firmware update. The process of firmware update will take about 3~5 seconds. While updating, please do not remove the USB Flash Drive.
- After completing the firmware update, please reboot the PT-TOOL-500.

► ARM

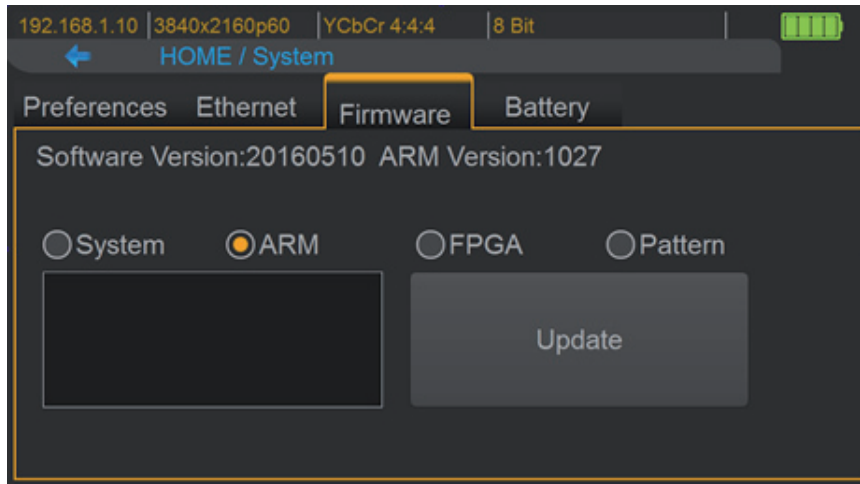


- Make sure the arm.dat file is in the root directory of USB.
- Connect the USB Flash Drive on PT-TOOL-500 USB interface.
- Select Firmware from the System Menu and choose the ARM button.
- Touch the Update button to do firmware update. The process of firmware update will take about 5~10 seconds. While updating, please do not remove the USB Flash Drive.

► FPGA

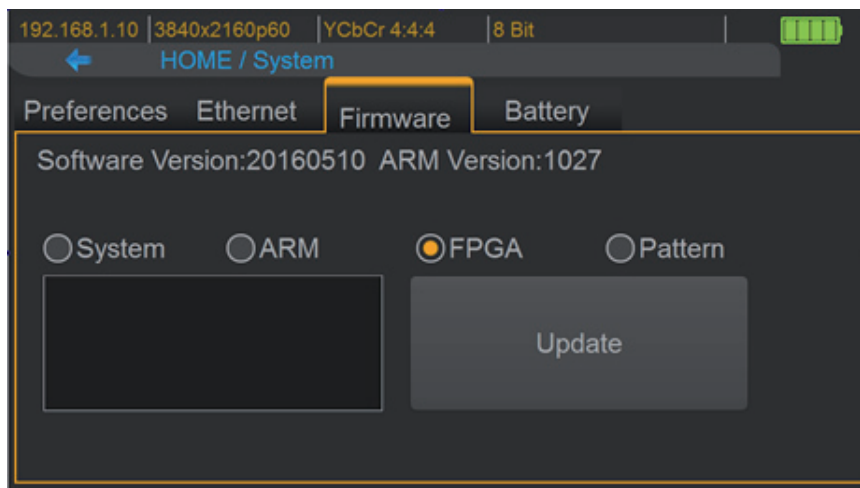

- Make sure the fpga.dat file is in the root directory of USB.
- Connect the USB Flash Drive on PT-TOOL-500 USB interface.
- Select Firmware from the System Menu and choose the FPGA button.
- Touch the Update button to do firmware update. The process of firmware update will take about 5~10 seconds. While updating, please do not remove the USB Flash Drive.

► Pattern

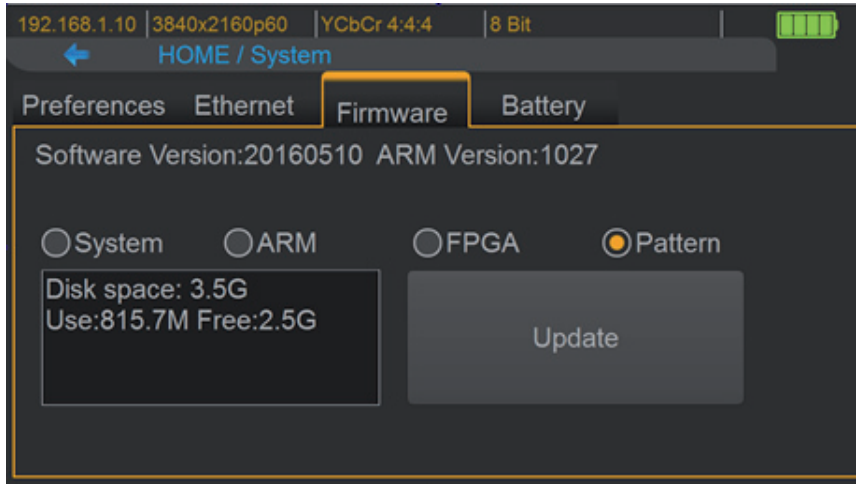

- Create a folder (folder name is usr_pic) on USB Flash Drive.
- Ensure the file of pattern which user desire to update on the PT-TOOL-500 is in the usr_pic directory of USB Flash Drive. The file suffix is .jpg.
- Before updating the user defined pattern, please confirm the capacity of the PT-TOOL-500.
- Select Firmware from the System Menu and choose the Pattern button.
- Touch the Update button to upgrade the user defined pattern. The process running time will depend on the file size, please wait patiently.

16. EYE Pattern

The device had been approved and supported by high performance oscilloscope (MSOX92004A) to make sure quality. The test result of this device (with Simplo battery) is shown as below:

*This result is representative of the PT-TOOL-500. Each PT-TOOL-500's performance is closed to these results but not exactly the same.





► Summary of Results

Test Statistics	
Failed	0
Passed	29
Total	29

Margin Thresholds	
Warning	< 2 %
Critical	< 0 %

Pass	# Failed	# Trials	Test Name	Actual Value	Margin	Pass Limits
✓	0	1	HF1-2: Clock Rise Time	105.981 ps	41.3 %	VALUE >= 75.000 ps
✓	0	1	HF1-2: Clock Fall Time	98.823 ps	31.8 %	VALUE >= 75.000 ps
✓	0	1	HF1-6: Clock Duty Cycle(Minimum)	49.870	24.7 %	>=40%
✓	0	1	HF1-6: Clock Duty Cycle(Maximum)	50.300	16.2 %	<=60%
✓	0	1	HF1-6: Clock Rate	148.427200000 MHz	2.4 %	85.000000000 MHz <= VALUE <= 150.000000000 MHz
✓	0	1	HF1-7: Differential Clock Voltage Swing, Vs (TP1)	1.023 V	22.1 %	400 mV < VALUE < 1.200 V
✓	0	1	HF1-7: Clock Jitter (TP2 EQ with Worst Case Positive Skew)	175 mTbit	41.7 %	VALUE <= 300 mTbit
✓	0	1	HF1-7: Clock Jitter (TP2 EQ with Worst Case Negative Skew)	200 mTbit	33.3 %	VALUE <= 300 mTbit
✓	0	1	HF1-5: D0 Maximum Differential Voltage	558 m	28.5 %	VALUE <= 780 m
✓	0	1	HF1-5: D0 Minimum Differential Voltage	-623 m	20.1 %	VALUE >= -780 m
✓	0	1	HF1-2: D0 Rise Time	91.503 ps	115.3 %	VALUE >= 42.500 ps
✓	0	1	HF1-2: D0 Fall Time	92.436 ps	117.5 %	VALUE >= 42.500 ps
✓	0	1	HF1-8: D0 Mask Test (TP2 EQ with Worst Case Positive Skew)	0.000	50.0 %	No Mask Failures
✓	0	1	HF1-8: D0 Mask Test (TP2 EQ with Worst Case Negative Skew)	0.000	50.0 %	No Mask Failures
✓	0	1	HF1-5: D1 Maximum Differential Voltage	593 m	24.0 %	VALUE <= 780 m
✓	0	1	HF1-5: D1 Minimum Differential Voltage	-597 m	23.5 %	VALUE >= -780 m
✓	0	1	HF1-2: D1 Rise Time	102.347 ps	140.8 %	VALUE >= 42.500 ps
✓	0	1	HF1-2: D1 Fall Time	100.664 ps	136.9 %	VALUE >= 42.500 ps
✓	0	1	HF1-8: D1 Mask Test (TP2 EQ with Worst Case Positive Skew)	0.000	50.0 %	No Mask Failures
✓	0	1	HF1-8: D1 Mask Test (TP2 EQ with Worst Case Negative Skew)	0.000	50.0 %	No Mask Failures
✓	0	1	HF1-5: D2 Maximum Differential Voltage	586 m	24.9 %	VALUE <= 780 m
✓	0	1	HF1-5: D2 Minimum Differential Voltage	-603 m	22.7 %	VALUE >= -780 m
✓	0	1	HF1-2: D2 Rise Time	93.095 ps	119.0 %	VALUE >= 42.500 ps
✓	0	1	HF1-2: D2 Fall Time	92.460 ps	117.6 %	VALUE >= 42.500 ps
✓	0	1	HF1-8: D2 Mask Test (TP2 EQ with Worst Case Positive Skew)	0.000	50.0 %	No Mask Failures
✓	0	1	HF1-8: D2 Mask Test (TP2 EQ with Worst Case Negative Skew)	0.000	50.0 %	No Mask Failures
✓	0	1	HF1-3: Inter-Pair Skew - D0/D1	1 mTpixel	49.8 %	-200 mTpixel <= VALUE <= 200 mTpixel
✓	0	1	HF1-3: Inter-Pair Skew - D1/D2	31 mTpixel	42.3 %	-200 mTpixel <= VALUE <= 200 mTpixel
✓	0	1	HF1-3: Inter-Pair Skew - D0/D2	28 mTpixel	43.0 %	-200 mTpixel <= VALUE <= 200 mTpixel

► Clock Jitter and eye pattern

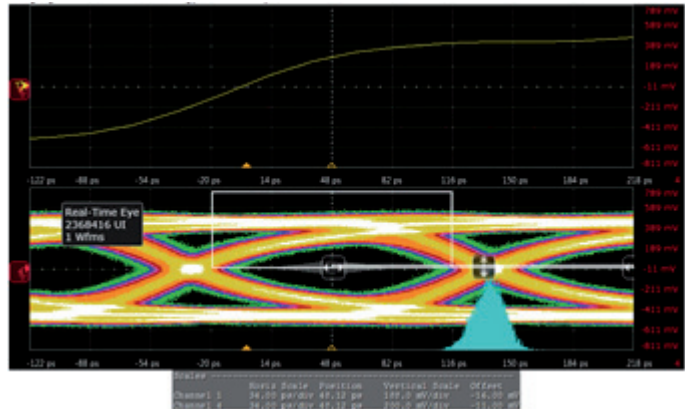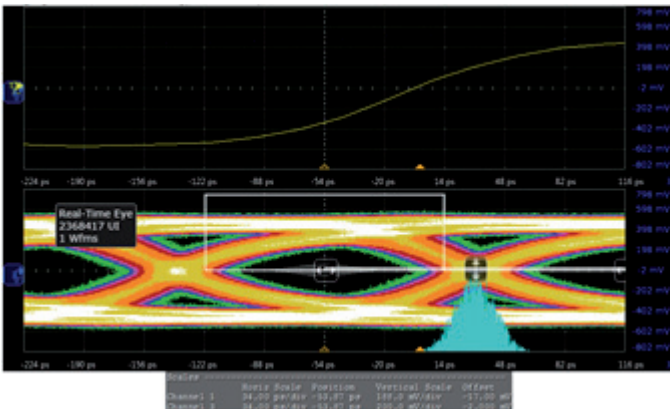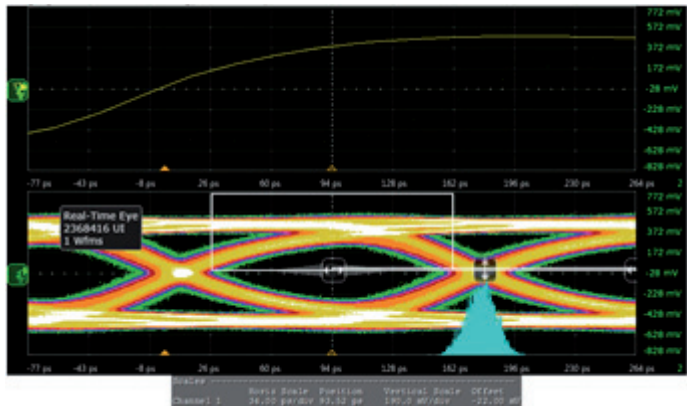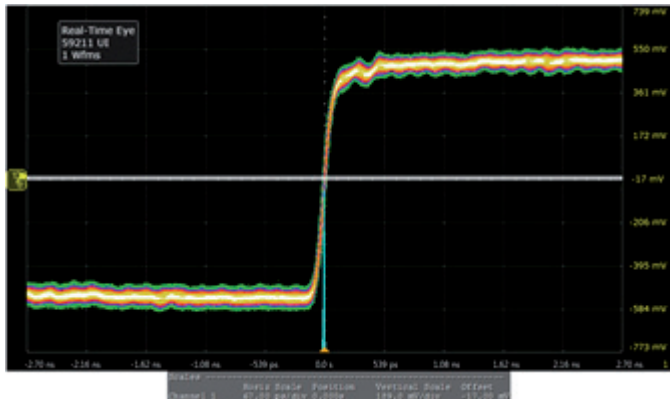

17. Limited Warranty

The SELLER warrants the PT-TOOL-500 HDMI 2.0 LCD Test Pattern Monitor to be free from defects in the material and workmanship for 1 year from the date of purchase from the SELLER or an authorized dealer. Should this product fail to be in good working order within 1 year warranty period, The SELLER, at its option, repair or replace the unit, provided that the unit has not been subjected to accident, disaster, abuse or any unauthorized modifications including static discharge and power surges.

Unit that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the day of reshipment to the BUYER. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number.

The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed.

Proof of sale may be required in order to claim warranty. Customers outside Taiwan are responsible for shipping charges to and from the SELLER. Cables are limited to a 30 day warranty and cable must be free from any markings, scratches, and neatly coiled.

The content of this manual has been carefully checked and is believed to be accurate. However, The SELLER assumes no responsibility for any inaccuracies that may be contained in this manual. The SELLER will NOT be liable for direct, indirect, incidental, special, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. Also, the technical information contained herein regarding the PT-TOOL-500 features and specifications is subject to change without further notice.

Asking for Assistance

Technical Support:

Phone: +49 5971 800299 - 0

Fax: +49 5971 800299 - 99

Technical Support Hours:

8:30 AM to 5:00 PM Monday thru Thursday

8:30 AM to 4:00 PM Friday

Write To:

PureLink GmbH

Von-Liebig-Straße 10

D - 48432 Rheine

www.purelink.de
