



## High Speed HDMI to HDMI Adapter 270°

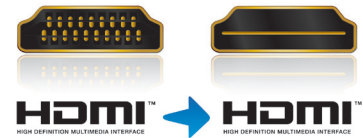


Due to its high reliability, the PureInstall Series high-speed HDMI Adapter PI040 is particularly suited for professional applications and installations. The adapter facilitates the space-saving connection between an HDMI cable and an HDMI Adapter-enabled device under a 270° angle.

- ➔ High Speed HDMI for 3D and HDTV resolutions up to 4k (2160p)
- ➔ Integrated Ethernet channel for 100 MBit network transfer via HDMI
- ➔ Particularly qualified for professional applications and installations

### Connections

Plug material:	PVC
Contact material:	24-Carat gold plated
Shielding:	Yes
Connector 1:	HDMI Type A Male (19pin)
Connector 2:	HDMI Type A Female (19pin)
Dimensions:	27,1 x 20,2 x 16,4 (mm)

**270°**

### Cable

Type:	-
Length:	-
Inner conductor material:	-
AWG:	-
Number of shieldings:	-
Shielding 1:	-
Shielding 2:	-
Shielding 3:	-
Outer sheath material:	-
Outer sheath diameter:	-

### Signal transmission

Transmission modes:	Digital audio and video signals
Max. bandwidth:	340MHz
Max. Transfer rate:	10,2 Gbit/s
Max. resolution:	4K (4096x2160)
Supported color spaces :	16/24 bit RGB/YUV, Deep Color, x.v.Color™
Supported audio standards:	Audio-Return-Channel (ARC), Dolby Digital Plus, Dolby TrueHD, DTS-HD Master Audio™, DVD Audio, SA-CD
Other supported standards:	HDMI Ethernet Channel (HEC), 3D, HDCP, CEC, 4K2K (2160i/p), FullHD (1080i/p), HD ready (720i/p), SDTV (480i/p)



Model No.	Color	Length
PI040	black	-

